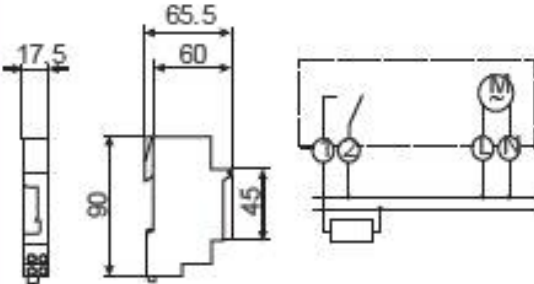


SL-CP12 Series

Timer relay

Classification		Timer	
Model		SL-CP12020	
Appearance			
Contact capacity		AC 230V 16A	AC 220V 16A
Full timing range		24h	24h
Contact resistance		≤ 50m Ω	≤ 50m Ω
Insulation resistance		≥ 100M Ω	≥ 100M Ω
Coil voltage		110,230V AC	110,230V AC
Life	Electrical	10 ⁵ times	10 ⁵ times
	Mechanical	10 ⁷ times	10 ⁷ times
Operating temperature		-10°C ~ +50°C	-40°C ~ +55°C
Dimensions(mm)			
Battery (working reserve)		Time 70h	Without battery
Minimum setting unit		15Minutes	15Minutes
Set up times		15m/per times 96 times	15m/per times 96 times