


OPTONICA




LED Strip 2835 Non-Waterproof Professional Edition

Light color



White light

Stamps



Technical Specification

Catalog Number	4710
Brand	Optonica
Product Code	ST2835-A1
Energy Consumption	9.6/m kWh/1000h
Input voltage	DC12V
Flux	600 lm/m
FLUX per watt	63lm/W
IP	20
Dimmable	Yes
Correlated Color Temperature	6000K
Light Color	White light
EAN Code	3800156647107
Energy Efficiency Label	G
Beam angle	120°
Power Factor	0.5
On/Off Cycles	25 000x


Instant On	0.2s
Material	Flex PCB
Operating Frequency	50-60 Hz
Temperature	-30°C / +50°C
Ra ≥	80
Life span	25 000 Hours
LED Type	SMD
LEDs/m	120
Power per meter	9.6W/m
Roll	5 m
Lumen maintenance at end of service life	70%
Size of product	8 x 1mm
Gross weight	0,071 kg
Net weight	0,011 kg
Warranty	2 Years

OPTONICA




LED Strip 2835 Non-Waterproof Professional Edition

Light color



Neutral white

Stamps



Technical Specification

Catalog Number	4740
Brand	Optonica
Product Code	ST2835-A1
Energy Consumption	9.6/m kWh/1000h
Input voltage	DC12V
Flux	600 lm/m
FLUX per watt	63lm/W
IP	20
Dimmable	Yes
Correlated Color Temperature	4500K
Light Color	Neutral white
EAN Code	3800156647404
Energy Efficiency Label	G
Beam angle	120°
Power Factor	0.5
On/Off Cycles	25 000x


Instant On	0.2s
Material	Flex PCB
Operating Frequency	50-60 Hz
Temperature	-30°C / +50°C
Ra ≥	80
Life span	25 000 Hours
LED Type	SMD
LEDs/m	120
Power per meter	9.6W/m
Roll	5 m
Lumen maintenance at end of service life	70%
Size of product	8 x 2mm
Gross weight	0,071 kg
Net weight	0,010 kg
Warranty	2 Years

OPTONICA




LED Strip 2835 Non-Waterproof Professional Edition

Light color



Warm white

Stamps

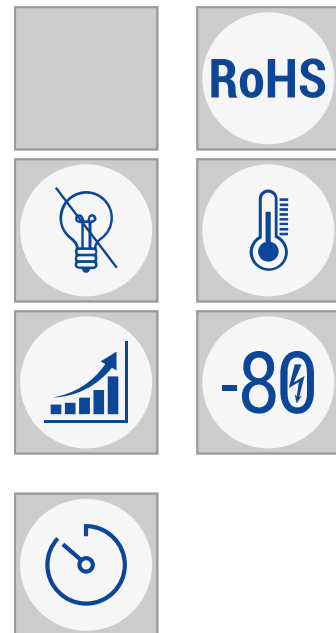

Technical Specification

Catalog Number	4711
Brand	Optonica
Product Code	ST2835-A1
Energy Consumption	9.6/m kWh/1000h
Input voltage	DC12V
Flux	600 lm/m
FLUX per watt	63lm/W
IP	20
Dimmable	Yes
Correlated Color Temperature	2700K
Light Color	Warm white
EAN Code	3800156647114
Energy Efficiency Label	G
Beam angle	120°
Power Factor	0.5
On/Off Cycles	25 000x

Instant On	0.2s
Material	Flex PCB
Operating Frequency	50-60 Hz
Temperature	-30°C / +50°C
Ra ≥	80
Life span	25 000 Hours
LED Type	SMD
LEDs/m	120
Power per meter	9.6W/m
Roll	5 m
Lumen maintenance at end of service life	70%
Size of product	8 x 2mm
Width	8 mm
Gross weight	0,071 kg
Net weight	0,011 kg
Warranty	2 Years