
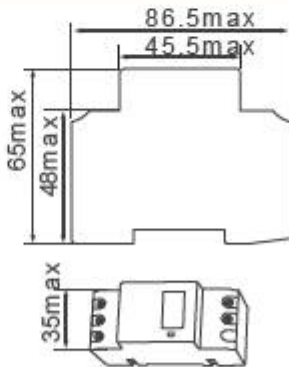


Classification		Timer
Model		SL-CP12025
Appearance		
Contact capacity		12A AC250V
Full timing range		1NC/1NO
Contact resistance		$\leq 2/\text{day}$
Insulation resistance		AC220V 50/60HZ 85% 110%
Coil voltage		110,220V AC
Life	Electrical	10^5 times
	Mechanical	10^5 times
Operating temperature		$0^{\circ}\text{C} \sim +40^{\circ}\text{C}$
Dimensions(mm)		
Battery (working reserve)		----
Minimum setting unit		0.5Minutes
Set up times		1M, 1.5M, 2M, 2.5M, 3M, 3.5M, 4M, 4.5M, 5M, 5.5M, 6M, 6.5M, 7M
Remarks		15 days